


Polymax Anchor Mat

Anti vibration rubber pad comes in two material NR/NBR. This matting has 5mm wide ribs which are at 90 degrees on the surface and the underside of the mat allowing a better friction ratio compared to other mats.

There are two types to the mat; NR for general purpose applications and NBR for oil resistant applications.

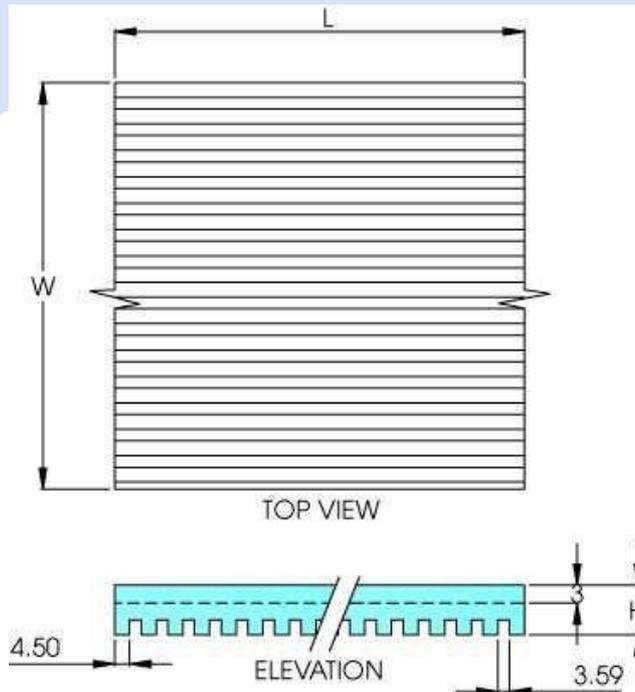

Technical Properties (Summary)

Material:	NR / NBR	
Colour:	Black	
Density [specific gravity]:	1.08	
Hardness [Degress Shore A]:	50°± 5°	
Tensile Strength [Mpa]:	3.4	
Elongation at Break [%]:	270%	
Max Pressure [Kg/cm²]:	1.5 Kg/cm ² for 10mm Thickness	2.0 Kg/cm ² for 8mm Thickness
Min. Temperature [°C]:	-10 (avoid prolonged exposure)	
Max Temperature [°C]:	+70 (avoid prolonged exposure)	

NB: The information given above is based upon average values and is no way intended as a warranty. The purchaser is deemed responsible for determining the suitability of the product for any particular application. All data relating to suitable uses and description information concerning our products are compiled from research and are believed to be reliable, but are provided for guidance purposes only. The Company holds no legal or contractual responsibility for information supplied.