

Fluorosilicone Sheet Blue 915mm x 0.8mm 60ShA

Product SKU: 3043950


This sheeting provides the same mechanical properties as silicone with an improvement to fuel and mineral oil resistance.

Colour: Blue

Material: Fluorosilicone

Operating temperature range: -53.8°C to 260°C

AMR-R-25988(MIL-R-25988) (B)(MIL-DTL-25988) (B)TYII CL1 GR60, AMS 3325, REACH and RoHS.

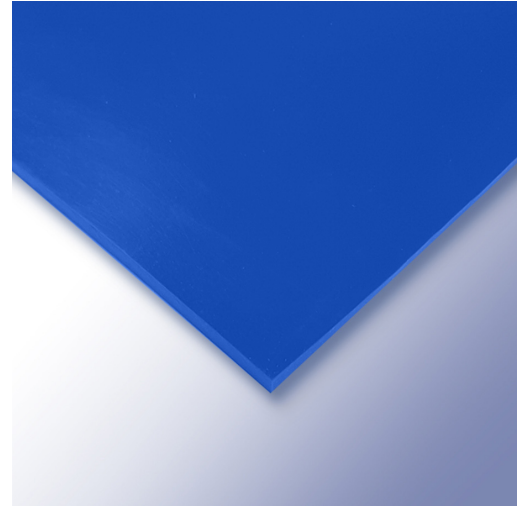

| Physical Property | Test Method | Units | Typical Values |
|---------------------|--------------------|-----------|----------------|
| Hardness | ASTM D412 | ShA | 60 |
| Elongation at Break | ASTM D412 | % | 200 |
| Tensile Strength | ASTM D412 | MPa | 6.2 |
| Tear Resistance | ASTM D412 | kN/m | |
| Compression Set | | % | |
| Tear Resistance | ASTM D624 | PPI Die B | 40 |
| Volume Change | Fuel C 22hrs @25°C | % | 20 |

Although the technical details and recommendations made correspond to the best of our knowledge and experience, all the above information must, in every case, be taken as merely indicative and subject to confirmation after long-term practical application; for this reason, anyone who intends to use Polymax products must ensure beforehand that it is suitable for the envisaged application. In every case, the user alone is fully responsible for any consequences deriving from the use of the product. All sales subject to our standard terms www.polymax.co.uk/sales-terms